


### OPTIONAL ACCESSORIES:

- EXTENSION PLATFORM TO 1.6m @ 200kg CAPACITY
- RUBBER FLAP BETWEEN PLATFORM & WORKFACES
- CAGED & MESHED IN HIGH BACK PLATFORM TO 1.8m

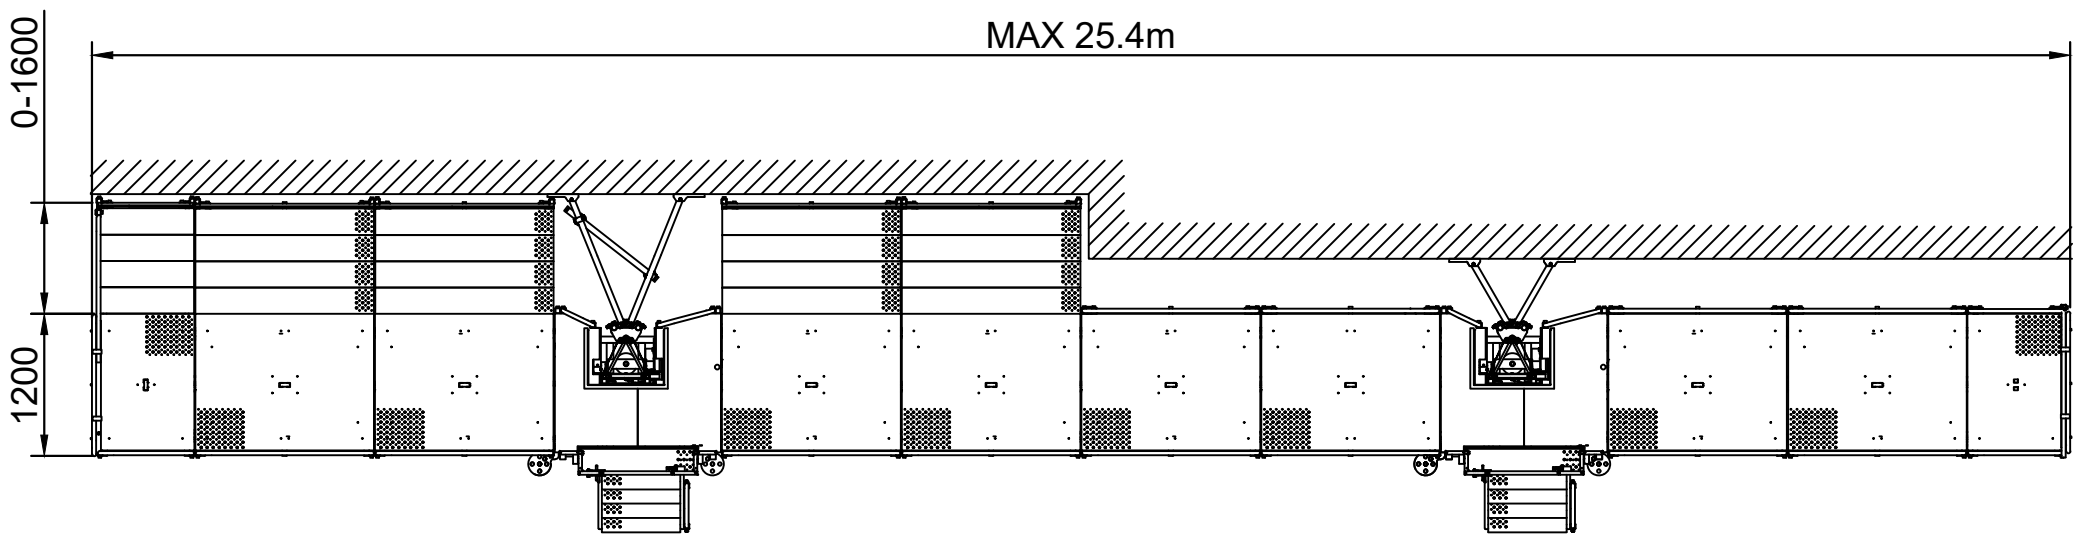

CAMAC C2000 Climber	Capacity range (kg)	Max work deck Length (m)	Platform Height to Ground (mm)	Power Outlet Required	Min Power Supply Cable (mm sq.)	Min Generator	Size of Base Grillage (m)	Main work deck Width (mm)	Main work deck Extension Range (mm)	Bracing Interval (m)	Max Standard Height (m)	Max Possible Height (m)	High Back Enclosure Height (mm)
Single	200-800	1-9	1150	20A/415V	6	45kVA	1.6 x 1.3	1200	0 - 1600	Max 7	100	120	1800
Twin	200-1400	3.2X25.4	1150	32A/415V	6	70kVA	1.6 x 1.3	1200	0 - 1600	Max 7	100	120	1800