
Aussie LIFTS. SHIFT

Ph: 13001H0IST www.aussiehoist.com.au SYDNEY 12 Loftus St Arncliffe 2205 MELBOURNE 59 Tanbridge Way Warranwood 3134

MABER MBA800






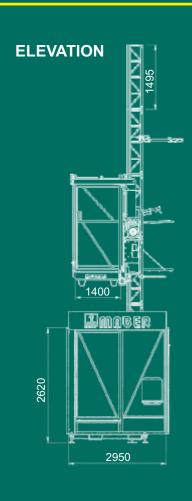







Maber Personal Hoists	Capacity (kg)	Platform Size (m)	Ramp Size (m)	Platform height to Ground (mm)	Power Outlet Required	Power Circuit Required	Min Generator	Ground Footprint Required (m)	Min Penetration Size (m)	Mast** Location	3rd ramp size (m)	Stowed Height (m)	Min Door size*** (m)
MBA800	800	1 x 2	n/a	350	32amp 4pin 415V	Min 10mm² cable 60A C/B	50KVA 415V	2.4* x 2.4	2.1* x 2.4	Right	1.5 x 1	1.8	2.4 x 2
MBA800 Wide	750	1.5 x 2	n/a	350	32amp 4pin 415V	Min 10mm² cable 60A C/B	50KVA 415V	3.0* x 2.4	2.6* x 2.4	Right	1.5 x 1	1.8	2.4 x 2

^{*}Is distance along the edge of structure. This is the side where materials are offloaded from hoist to building. The other dimension is measured out or away from the building.

** This is specified when standing outside of the building looking towards the building at the location of the hoist (when standing within the building it is opposite).

*** This is with machine either folded up, or separated to the smallest possible component for transport.