


Key	
A	Overall car length
B	Overall car width
C	Overall car height
D	Overall base cage length
E	Overall base cage width
F	Ground clearance
G	Internal car height
H	Doorway height
Hp	Internal car length
L	Doorway length
I	Internal car width
Ip	Doorway width

Modularity	
Car length (M) is scalable every 0.5 m	

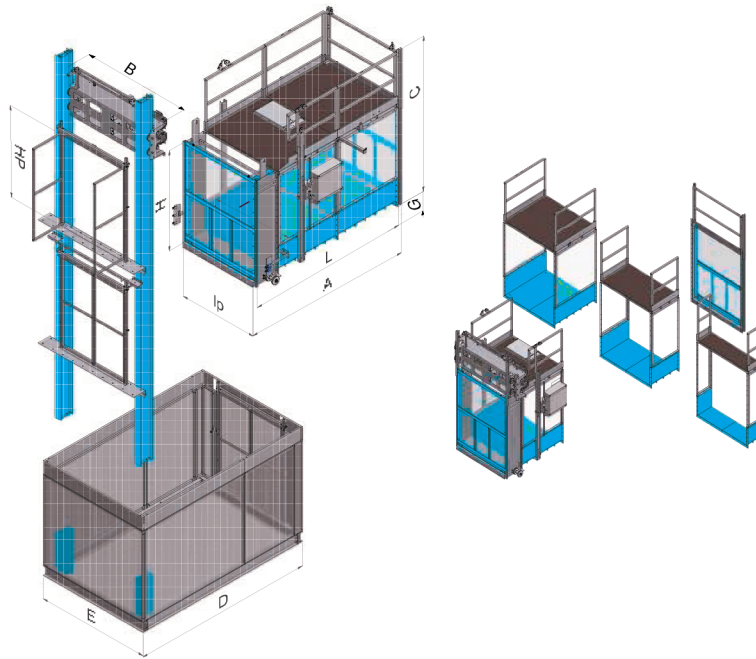

ELEVATOR LL 2500 M

Model	M = 1.9 M	M = 2.50 M	M = 3 M	M = 3.50 M	M = 4 M	M = 4.50 M			
Dimensions									
Internal car length L (m)	1.9	2.5	3.0	3.57	4.07	4.57			
Internal car width I (m)	1.70	1.70	1.70	1.70	1.70	1.70			
Internal car height H (m)	2.10	2.10	2.10	2.10	2.10	2.10			
Doorway size Ip x Hp (m)	1.50	1.50	1.50	1.50	1.50	1.50			
Overall car size A x B x C (m)	2.2 x 2.4 x 3.4	2.7 x 2.4 x 3.4	3.2 x 2.4 x 3.4	3.7 x 2.4 x 3.4	4.2 x 2.4 x 3.4	4.7 x 2.4 x 3.4			
Overall base cage size D x E (m)	2.50 x 2.50	3.0 x 2.50	3.3 x 1.9	4.0 x 2.50	4.50 x 2.50	5.0 x 2.50			
Mast center distance (m)	2.0	2.0	2.0	2.0	2.0	2.0			
Ground clearance G (m)	0.2	0.2	0.2	0.2	0.2	0.2			
Load volume (m ³)	7.3	9	10.8	12.5	14.3	16			
Internal car size (m ²)	3.4	4.25	5.1	5.95	6.8	7.65			
Weight									
Empty car + engine weight (kg)	1 427	1 600	1 654	1 725	1 869	1 922			
Maximum payload (kg)	4 427	4 600	4 454	4 225	4 069	3 522			
Ground enclosure weight (kg)	547	588	629	670	711	752			
Max torque at max payload (m x kg)	2 700	3 450	4 200	4 500	4 620	4 800			
Net torque (m x kg)	571	900	1 100	1 370	1 914	2 194			
Max torque (m x kg)	3 271	4 350	5 300	4 870	6 534	7 000			
Capacity / Power feeder data									
SPEED	12 m/min DOL ⁽¹⁾	Max. Payload (kg) / Max. Passenger	3 000 / 15	3 000 / 20	2 800 / 25	2 500 / 25	2 200 / 22	1 600 / 16	
		Nominal Power (kW)	11 [5.5] x 2	11 [5.5] x 2	11 [5.5] x 2	11 [5.5] x 2	11 [5.5] x 2	11 [5.5] x 2	11 [5.5] x 2
		Nominal In ⁽³⁾ / Is ⁽⁴⁾ (A)	24 / 144	24 / 144	24 / 144	24 / 144	24 / 144	24 / 144	24 / 144
	18 m/min FC ⁽²⁾	Max. Payload (kg) / Max. Passenger	3 000 / 15	2 700 / 20	2 500 / 25	2 250 / 25	2 000 / 22	1 500 / 16	
		Nominal Power (kW)	15 [7.5] x 2	15 [7.5] x 2	15 [7.5] x 2	15 [7.5] x 2	15 [7.5] x 2	15 [7.5] x 2	15 [7.5] x 2
		Nominal In ⁽³⁾ / Is ⁽⁴⁾ (A)	32 / 96	32 / 96	32 / 96	32 / 96	32 / 96	32 / 96	32 / 96
	24 m/min FC ⁽²⁾	Max. Payload (kg) / Max. Passenger	2 700 / 15	2 400 / 20	2 400 / 25	2 000 / 25	1 800 / 22	1 300 / 16	
		Nominal Power (kW)	18.4 [9.2] x 2	18.4 [9.2] x 2	18.4 [9.2] x 2	18.4 [9.2] x 2	18.4 [9.2] x 2	18.4 [9.2] x 2	18.4 [9.2] x 2
		Nominal In ⁽³⁾ / Is ⁽⁴⁾ (A)	40 / 120	40 / 120	40 / 120	40 / 120	40 / 120	40 / 120	40 / 120
	30 m/min FC ⁽²⁾	Max. Payload (kg) / Max. Passenger	2 400 / 15	2 100 / 20	2 100 / 25	1 700 / 25	1 500 / 22	1 200 / 16	
		Nominal Power (kW)	22 [11] x 2	22 [11] x 2	22 [11] x 2	22 [11] x 2	22 [11] x 2	22 [11] x 2	22 [11] x 2
		Nominal In ⁽³⁾ / Is ⁽⁴⁾ (A)	50 / 150	50 / 150	50 / 150	50 / 150	50 / 150	50 / 150	50 / 150

⁽¹⁾DOL = Direct On Line / ⁽²⁾FC = Frequency Controller (speed) / ⁽³⁾In = Nominal current / ⁽⁴⁾Is = Starting current

Other features	
Power supply	400 V (+/-5%) – 50 Hz – 3P + N + E
Type of operation	Lift man - Intercall - Automatic
Support	Ground - Suspended
Cabin door opening	Vertical sliding door - Roller shutter
Anchoring of ties to	Concrete wall - Concrete slab edge - Cut stone - Brick - Metal structure - Scaffolding
Distance between mast ties	1 st mast tie ≤ 3m, then ≤ 6 m
Height above the last tie (m)	3
Standard maximum lifting height (m)	50
Mast dimensions (m) / weight (kg)	0.3 x 2-4-6-8-10-12 / 60 x 2 mâts = 120
Patented safety devices XL	Centrifugal brake - Freewheel - XL key
Modularity	Driving unit convertible into a MCP - Custom-made car size upon request - Engines can be assembled either on the side, below or above the car
Conformity	Directive 2006/42/EC on machinery (CE Certified) EN 12159 (designed and manufactured according to standard requirements)

This data sheet is confidential and intended solely for the use of the individual or entity to whom it is addressed. It may not be copied, photocopied or transmitted by electronic means of any nature whatsoever, in whole or in part, without the prior written consent of XL INDUSTRIES or its subsidiaries. Due to constant improvements made to our products or changes in regulations, the specifications given in this technical data sheet are for information purposes only.